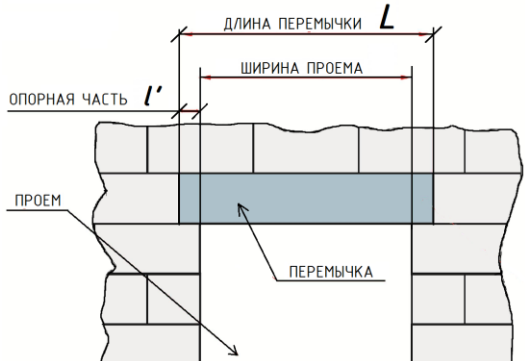



СЕРИЯ 1.038.1-1 ПРЕМЫЧКИ ЖЕЛЕЗОБЕТОННЫЕ

Марка перемычки	Ширина перекрываемого проема, мм	Минимальная глубина опирания l' , мм	Габариты перемычки			Масса кг	Расчетная нагрузка Q , кгс/м
				Длина L , мм	Ширина B , мм		
1 ПБ 10-1	830	100	1030	120	65	20	100
1 ПБ 13-1	1090	100	1290	120	65	25	150
1 ПБ 16-1	1350	100	1550	120	65	30	150
2 ПБ 10-1	830	100	1030	120	140	43	100
2 ПБ 13-1	1090	100	1290	120	140	54	150
2 ПБ 16-2	1350	100	1550	120	140	65	250
2 ПБ 17-2	1480	100	1680	120	140	71	250
2 ПБ 19-3	1740	100	1940	120	140	81	300
2 ПБ 22-3	2000	100	2200	120	140	92	350
2 ПБ 25-3	2260	100	2460	120	140	103	350
2 ПБ 26-4	2390	100	2590	120	140	109	400
2 ПБ 29-4	2650	100	2850	120	140	120	400
2 ПБ 30-4	2690	150	2990	120	140	125	400
3 ПБ 13-37	950	170	1290	120	220	85	3800
3 ПБ 16-37	1210	170	1550	120	220	102	3800
3 ПБ 18-37	1410	170	1750	120	220	119	3800
3 ПБ 18-8	1470	170	1810	120	220	119	800
3 ПБ 21-8	1730	170	2070	120	220	137	800
3 ПБ 25-8	2120	170	2460	120	220	162	800
3 ПБ 27-8	2380	170	2720	120	220	180	800
3 ПБ 30-8	2560	210	2980	120	220	197	800
3 ПБ 34-4	3170	100	3370	120	220	222	400
3 ПБ 36-4	3430	100	3630	120	220	240	400
3 ПБ 39-8	3470	210	3890	120	220	257	800
4 ПБ 30-4	2780	100	2980	120	290	259	400
4 ПБ 44-8	3990	210	4410	120	290	384	800
4 ПБ 48-8	4380	210	4800	120	290	418	800
4 ПБ 60-8	5460	250	5960	120	290	519	800
5 ПБ 18-27	1470	170	1810	250	220	250	2800
5 ПБ 21-27	1730	170	2070	250	220	285	2800
5 ПБ 25-27	2000	230	2460	250	220	338	2800
5 ПБ 25-37	2000	230	2460	250	220	338	3800
5 ПБ 27-27	2260	230	2720	250	220	375	2800
5 ПБ 27-37	2260	230	2720	250	220	375	3800
5 ПБ 30-27	2520	230	2980	250	220	410	2800
5 ПБ 30-37	2520	230	2980	250	220	410	3800
5 ПБ 31-27	2650	230	3110	250	220	428	2800
5 ПБ 34-20	2910	230	3370	250	220	463	2000
5 ПБ 36-20	3170	230	3630	250	220	500	2000